

## 45 W SELV Dimmable DALI-2 LED driver

Product code: 5743

45 W 220 – 240 V 0/ 50 – 60 Hz

- DALI-2 certified LED driver, 1-100 % dimming range
- SELV output protection for safety and flexibility in luminaires
- Amplitude dimming for the highest quality light output
- NFC technology for wireless programming
- Low current ripple, complying with IEEE 1789 recommendation
- Suitable for DC use
- Optimised driver mechanics for independent usage applications
- Integrated spacious strain reliefs with screwless clamps, quick and simple installation process
- Doubled input terminals for looping the mains and DALI cables
- Ideal solution for Class I, Class II and Class III (SELV) luminaires



### Functional Description

- Adjustable constant current output: 600 mA (default) to 1050 mA
- Current setting programmable via NFC, DALI or with external (LED-Iset) resistors
- Suitable for flicker-free camera recording applications
- Latest technology Switch-Control 2 functionality for easy-to-use intensity control
- Full load recognition with automatic recovery, open and short circuit protection
- Multipurpose terminal LED-Iset/NTC for current setting or overtemperature protection
- Constant Light Output (CLO), adjustable up to 100 000 h (default disabled)
- Helvar Driver Configurator support
- Energy consumption monitor (real time), running hour monitor (accumulative), energy management (accumulative)
- Memory bank for OEM customer data

### Mains Characteristics

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Voltage range                    | 198 VAC – 264 VAC                     |
|                                  | Withstands max. 320 VAC (max. 1 hour) |
| DC range                         | 176 VDC - 280 VDC                     |
| starting voltage                 | > 190 VDC                             |
| Mains current at full load       | 0.19 – 0.26 A                         |
| Frequency                        | 0 / 50 Hz – 60 Hz                     |
| Stand-by power consumption       | < 0.5 W                               |
| THD at full power                | < 12 %                                |
| Leakage current to earth         | < 0.3 mA                              |
| Tested surge protection          | 1 kV L-N, 2 kV L-GND (IEC 61000-4-5)  |
| Tested fast transient protection | 4 kV (IEC 61000-4-4)                  |

### Insulation between circuits & driver case


|                                      |                              |
|--------------------------------------|------------------------------|
| Mains circuit - SELV circuit         | Double/reinforced insulation |
| DALI circuit - SELV circuit          | Double/reinforced insulation |
| Mains circuit - DALI circuit         | Basic insulation             |
| Mains, DALI and output - Driver case | Double/reinforced insulation |
| Mains input - Ground input           | Basic insulation             |

### Load Output (SELV <60 V)

|                              |                                            |
|------------------------------|--------------------------------------------|
| Output current ( $I_{out}$ ) | 600 mA (default) – 1050 mA                 |
| Accuracy                     | ± 5 %                                      |
| Ripple                       | < 1 %* at ≤ 120 Hz                         |
|                              | *] Low frequency, LED load: Cree XP-G LEDs |
| $U_{out}$ (max) (abnormal)   | 60 V                                       |



| $I_{LED}$                   | 600 mA    | 1050 mA     |
|-----------------------------|-----------|-------------|
| $P_{Rated}$                 | 32.4 W    | 45 W        |
| $U_{LED}$                   | 25 - 54 V | 25 - 42.8 V |
| PF (λ) at full load         | 0.95      | 0.97        |
| Efficiency (η) at full load | 88 %      | 88 %        |

## Operating window

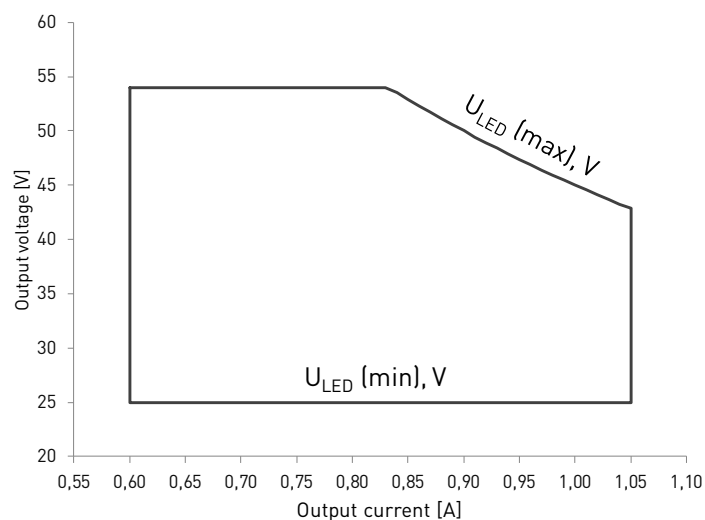

Note: Dimming between 1 % - 100 % possible across the whole operating window

## Driver performance

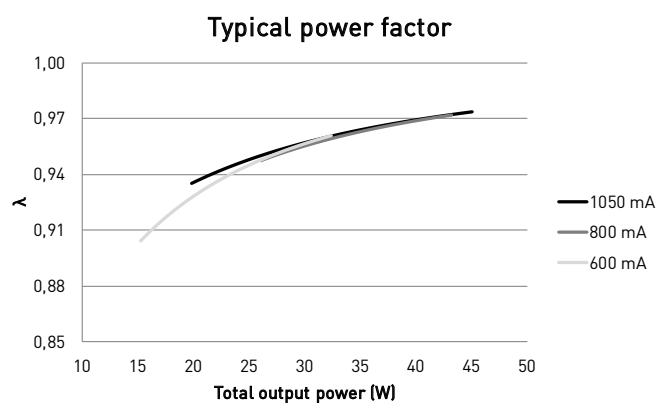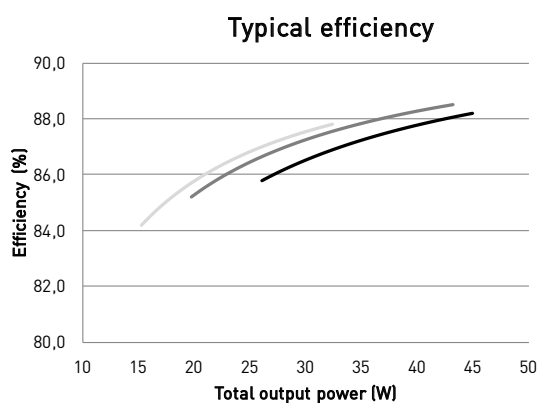


## Operating Conditions and Characteristics

|                                                  |                             |
|--------------------------------------------------|-----------------------------|
| Absolute highest allowed $t_c$ point temperature | 85 °C                       |
| $T_c$ life (60 000 h) temperature                | 85 °C                       |
| Ambient temperature range                        | -25 °C ... +45 °C*          |
| in independent use                               | -25 °C ... +45 °C           |
| Storage temperature range                        | -40 °C ... +80 °C           |
| Maximum relative humidity                        | No condensation             |
| Life time (90 % survival rate)                   | 100 000 h, at $t_c = 75$ °C |
|                                                  | 90 000 h, at $t_c = 80$ °C  |
|                                                  | 60 000 h, at $t_c = 85$ °C  |

\* ) For other than independent use, higher  $t_s$  of the controlgear possible as long as highest allowed  $t_c$  point temperature is not exceeded

## Amplitude dimming technology

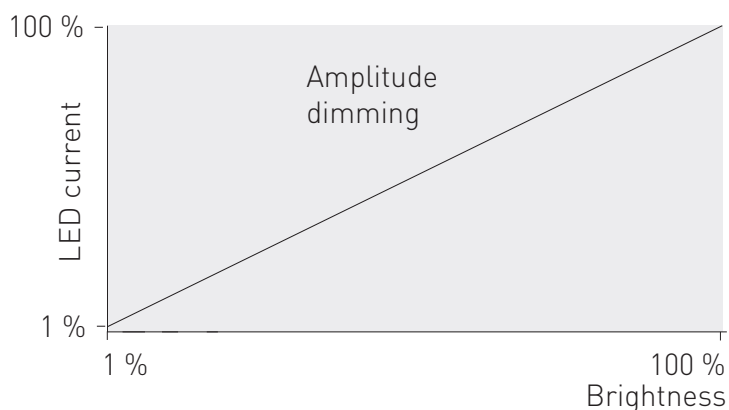


| Dimming range | Dimming technology |
|---------------|--------------------|
| 1 % – 100 %   | Amplitude (DC)     |

LC45SE-DA-600-1050-LOOP driver implements amplitude dimming technology across whole dimming range. Amplitude dimming offers the best available technology for dimming the light output in an accurate and flicker-free way to ensure high quality lighting in even the most demanding situations such as camera recording applications. Amplitude dimming technology complies with IEEE 1789-2015 recommendations of current modulation to mitigate health risks to viewers.

## Wireless configuration

LC45SE-DA-600-1050-LOOP LED driver is equipped with NFC wireless technology for effortless configuration of the driver via Helvar Driver Configurator Support. Helvar Driver Configurator enables easy-to-use automatic configuration of the driver parameters via NFC, without mains or DALI connection to the driver. The most popular MD-SIG qualified NFC readers (FEIG CPR30-USB & ISC.MR102-USB) are supported giving flexibility for the operator. For further information about the usage with Helvar Driver Configurator, please see the user guide at [www.helvar.com](http://www.helvar.com)

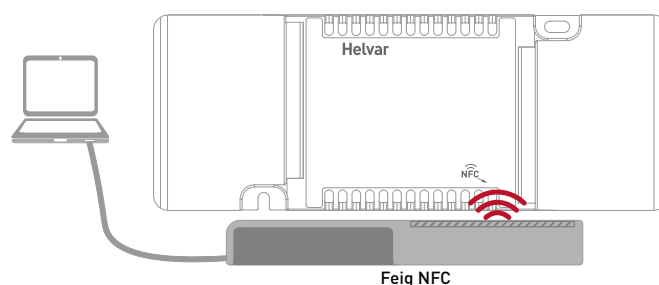


## Quantity of drivers per miniature circuit breaker 16 A Type C

| Based on $I_{cont}$ | Based on inrush current $I_{peak}$ | Typ. peak inrush current $I_{peak}$ | 1/2 value time, $\Delta t$ | Calculated energy, $I_{peak}^2 \Delta t$ |
|---------------------|------------------------------------|-------------------------------------|----------------------------|------------------------------------------|
| 48 pcs.             | 111 pcs.                           | 19 A                                | 115 $\mu s$                | 0.0031 A <sup>2</sup> s                  |

## CONVERSION TABLE FOR OTHER TYPES OF MINIATURE CIRCUIT BREAKER

| MCB type | Relative quantity of LED drivers |
|----------|----------------------------------|
| B 10 A   | 37 %                             |
| B 16 A   | 60 %                             |
| B 20 A   | 75 %                             |
| C 10 A   | 62 %                             |
| C 16 A   | 100 % (see table above)          |
| C 20 A   | 125 %                            |

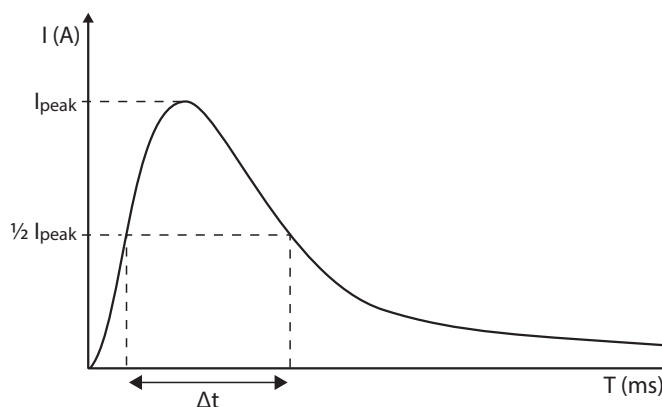


Type C MCB's are strongly recommended to use with LED lighting. Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

## Connections and Mechanical Data

|                                           |                                                   |
|-------------------------------------------|---------------------------------------------------|
| Wire size                                 | Input: 0.5 mm <sup>2</sup> – 2.5 mm <sup>2</sup>  |
| Wire type                                 | Output: 0.5 mm <sup>2</sup> – 1.5 mm <sup>2</sup> |
| Wire insulation                           | Solid core and fine-stranded                      |
| Maximum current through looping terminals | According to EN 60598                             |
| Maximum driver to LED wire length         | 16 A                                              |
| Weight                                    | 1.5 m                                             |
| IP rating                                 | 209 g                                             |
|                                           | IP20                                              |


## Connections

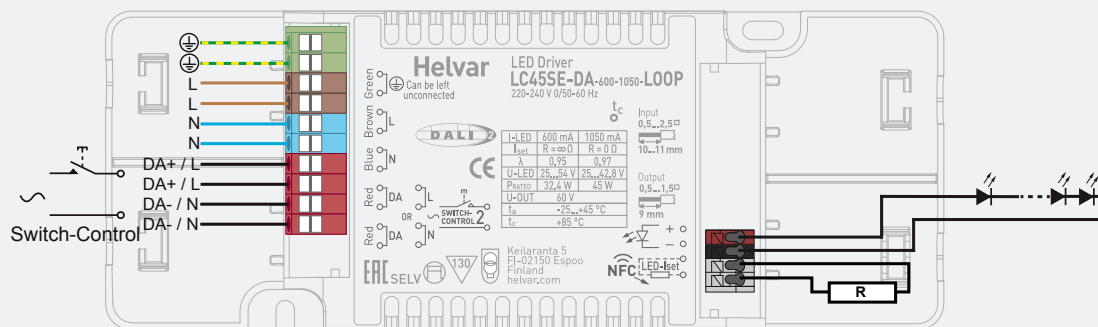

Note:

- PE terminal is for looping only and therefore earth connection is not needed for the functionality of the driver. See page 5 for details.
- When looping mains, only additional LED drivers shall be connected through the device terminals
- Not suitable for load side switching operation
- Label may differ if the unit is preset to fixed current

## Dimensions (mm)

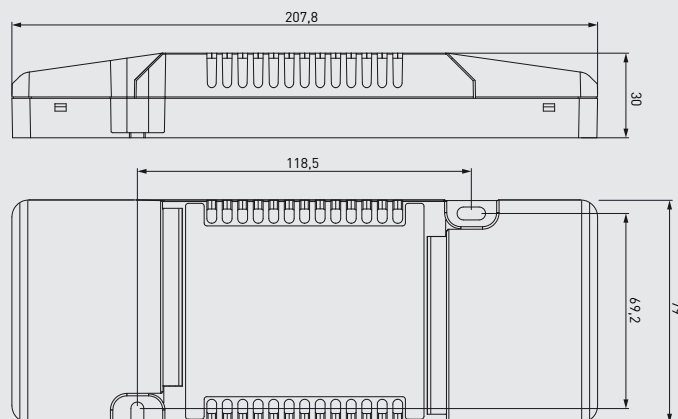

The LED-Iset resistor/current setting values are adjusted according to the LEDset specification. The resistor value for each required output current can thus be calculated from the formula  $R [\Omega] = (5 [V] / I_{out} [A]) * 1000$ . Below are the available LED-Iset resistors from Helvar, pre-adjusted for the most common output currents.

Helvar LED-Iset resistors and currents (Nominal  $I_{out} (\pm 5 \% \text{ tol.})$ )

| LED-Iset resistor model        | MAX    | 1000 mA | 950 mA | 900 mA | 850 mA | 800 mA | 750 mA | 700 mA | 650 mA | No resistor |
|--------------------------------|--------|---------|--------|--------|--------|--------|--------|--------|--------|-------------|
| $I_{out} (mA)$                 | 1050   | 1000    | 950    | 900    | 850    | 800    | 750    | 700    | 650    | 600         |
| Order code                     | T90000 | T91000  | T90950 | T90900 | T90850 | T90800 | T90750 | T90700 | T90650 | N/A         |
| Resistance values [ $\Omega$ ] | 0      | 4.99k   | 5.23k  | 5.6k   | 5.9k   | 6.2k   | 6.65k  | 7.15k  | 7.68k  | $\infty$    |

The current can be adjusted also with normal resistors by selecting suitable resistor value (formula  $R [\Omega] = (5 [V] / I_{out} [A]) * 1000$ ). Reference resistor values can be found below order code in the table above.

LC45SE-DA-600-1050-LOOP LED driver is suited for independent use and built-in usage in luminaires. In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.

## Installation & operation

### Maximum ambient and $t_c$ temperature:

- For built-in components inside luminaires, the  $t_a$  ambient temperature range is a guideline given for the optimum operating environment. However, integrator must always ensure proper thermal management (i.e. mounting base of the driver, air flow etc.) so that the  $t_c$  point temperature does not exceed the  $t_c$  maximum limit in any circumstance.
- Reliable operation and lifetime is only guaranteed if the maximum  $t_c$  point temperature is not exceeded under the conditions of use.

### Current setting resistor

LC45SE-DA-600-1050-LOOP LED driver features a constant current output adjustable via current setting resistor.

- An external resistor can be inserted in to the current setting terminal, allowing the user to adjust the LED driver output current.
- When no external resistor is connected, then the LED drivers will operate at their default lowest current level.
- A standard through-hole resistor can be used for the current setting. To achieve the most accurate output current it is recommended to select a quality low tolerance resistor. Minimum diameter for resistor leg is 0.51mm.
- Always connect the current setting resistor only into the terminals marked with LED-Iset on the LED driver label.
- For the resistor/current values, refer to the table on page 4.

### LED driver earthing


- LC45SE-DA-600-1050-LOOP is Class I LED driver suitable for Class I and II luminaires, as well as driving Class III (SELV) luminaire parts in independent installation.
- If used inside **Class I** luminaires, the earth cable is not required for electrical safety in this driver. The PE connection is designed for earth signal looping between drivers.
- If used inside **Class II** luminaires, the safety of the luminaire shall be ensured through double/reinforced insulation of live parts. LC45SE-DA-600-1050-LOOP has double/reinforced insulation between accessible and live parts, and is suitable for use in all Class II luminaires. In this case the earth terminal of the driver must be left unconnected and the luminaire terminal block shall not have any protective earthing terminal.
- If used in **independent** installation with Class I/II/III luminaires, the earth cable is not required to be connected. The PE connection is designed for earth signal looping between drivers.

### Miniature Circuit Breakers (MCB)


- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.
- Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

### Installation site

- The general preferred installation position of LED drivers for independent use is to have the top cover facing upwards.
- Minimum recommended distances below:

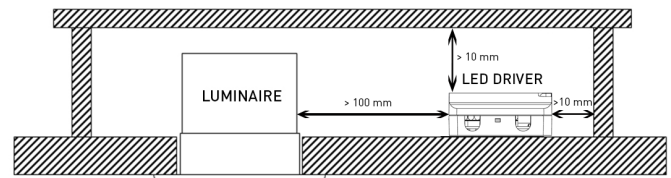

- Suitable for installation upside down and in the corner, in this case separate spacers must be used. For more information, please consult Helvar.

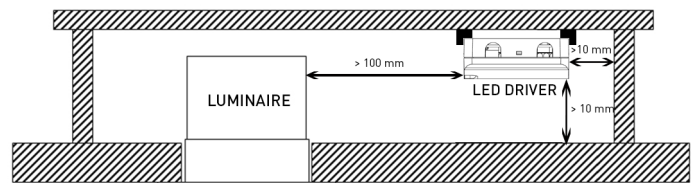

### Helvar Driver Configurator -support

LC45SE-DA-600-1050-LOOP LED driver is supported by Helvar Driver configurator software. The LC45SE-DA-600-1050-LOOP driver supports output current setting with software, the output current of the driver can be programmed using Helvar Driver Configurator, as well as OEM customer data and parameters for functions such as CLO. Programming the driver with Helvar Driver Configurator can be done either wirelessly via NFC or then via DALI bus. Also the operation of the multifunction LED-Iset terminal usage can be changed from current setting resistor (default) to NTC overtemperature protection operation.

## Lamp failure functionality

### No load

When open load is detected, driver will go to standby power consumption and remains in automatic recovery mode. In automatic recovery mode, the driver waits till load is returned and once that happens, it returns to normal operation.

### Short circuit

When short circuit is detected, driver goes to automatic recovery mode and follows the same logic as described in the no load condition.

### Overload

When overload is detected, driver goes to standby mode and returns through mains reset.

### Underload

When undervoltage is detected, driver goes to standby mode and returns through mains reset.

### NTC trigger

When NTC is enabled via Helvar Driver Configurator, driver follows NTC feature behaviour. Default NTC trigger point is 8,2 kΩ, after which the driver starts to decrease the output level.

## Switch-Control 2

### Use of Switch-Control functionality

- Maximum numbers of LED drivers to be connected to one Switch-Control circuit is 60. Wire length or amount of switches is not restricted by the driver technology.
- Ensure that all components connected to Switch-Control circuitry are mains rated.
- More information in Switch-Control User Guide a [www.helvar.com](http://www.helvar.com).

## Conformity & standards

|                                                                                                             |                                |
|-------------------------------------------------------------------------------------------------------------|--------------------------------|
| General and safety requirements                                                                             | EN 61347-1: 2015               |
| Particular safety requirements for DC or AC supplied electronic control gear for LED modules                | EN 61347-2-13: 2014 + A1: 2017 |
| Thermal protection class                                                                                    | EN 61347, C5e                  |
| Mains current harmonics                                                                                     | EN 61000-3-2: 2014             |
| Limits for voltage fluctuations and flicker                                                                 | EN 61000-3-3: 2013             |
| Radio frequency interference                                                                                | EN 55015: 2013                 |
| Immunity standard                                                                                           | EN 61547: 2009                 |
| Performance requirements                                                                                    | EN 62384: 2006+ A1:2009        |
| <b>Digital addressing lighting interface:</b>                                                               |                                |
| General requirements for DALI system                                                                        | EN 62386-101 (DALI-2)          |
| Requirements for DALI control gear                                                                          | EN 62386-102 (DALI-2)          |
| Requirements for control gear of LED modules (DALI Device Type 6)                                           | EN 62386-207 (DALI-2)          |
| Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers | IEEE 1789-2015                 |
| Compliant with relevant EU directives                                                                       |                                |
| RoHS/REACH compliant                                                                                        |                                |
| ENEC and CE marked                                                                                          |                                |

## Label symbols



Safety isolating control gear with short circuit protection (SELV control gear).



Thermally controlled control gear, incorporating means of protection against overheating to prevent the case temperature under any conditions of use from exceeding 130 °C.



DALI-2 certified control gear.



Driver equipped with NFC wireless technology for effortless configuration.