



- **Casambi DMX master module with 4 addressable DMX channels.**
- **Compatible with DMX512.**
- **Various DMX fixtures and color samples pre-programmed**
- **Simply operates with Casambi.**


The DMX module LIGA.AIR.DMX is controlled with the Casambi app.

The module is supplied with the supplied 24VDC power supply and can 4 DMX addresses resp. Address functions. The different DMX protocols, depending on the luminaire manufacturer and model, are already preprogrammed for easier installation.


In addition, different color gradients are already preprogrammed with the Casambi settable parameters color pattern, speed, and brightness.

The module is built into a gray polycarbonate housing with the dimensions 90 x 50 x 32mm.

Dimensional drawing:

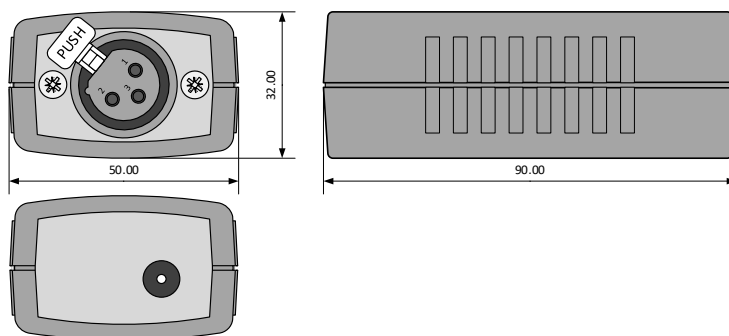

Schematics:

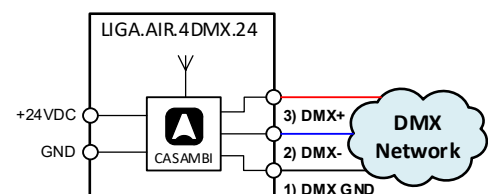

Installation durch die Elektrofachkraft nach den örtlichen Vorschriften!

Technical specifications:

Dimension (T x B x H)	90 x 50 x 32mm
Weight	65g
Enclosure color	Gray
Mounting	Detached
Environmental conditions	Operation: Temperature -20 ... 50°C, humidity < 85%rH Stock: Temperature -25 ... 65°C, humidity < 95%rH
Protection type / class	IP44, EN-60529 / Appliance Class II
Connections	DMX-OUT: XLR 3-pole female, 24VDC-IN: 5.1mm
Supply	24VDC, Plug-in power supply
Consumption	0.7W
Standards	Low Voltage Directive (LVD) 2014/35/EU, EN 60669-2-1 Electromagnetic compatibility (EMC) 2014/30/EU
CASAMBI Modul Standards	Bluetooth 4.0 Wireless Control
Switching times	Configurable with the Casambi application (App Store, Google Play)
Applications	Switching on of loads e.g. lamps etc.
Scope of delivery	1 DMX module, 24VDC plug-in power supply

Compatible devices:



iPhone 4S or later


iPad 3 or later

iPod Touch 5th gen or later.

Android 4.4 KitKat or later devices

produced after 2013 with full BT 4.0 support.

Range:

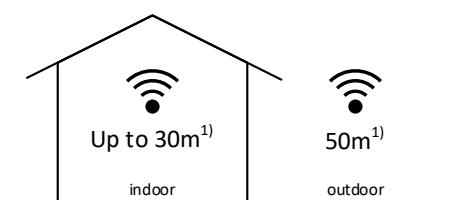

Casambi uses mesh network technology so each CBU-ASD acts also as a repeater.

Longer ranges can be achieved by using multiple Casambi units.

Range is highly dependent on the surrounding and obstacles, such as walls and building materials.



Settings according to luminaire manufacturer and model

The following list contains the setting of the Casambi profile, and the luminaire settings DMX address and operating mode sorted by manufacturer and luminaire model.

Manufacturer	Model	Casambi Profile	DMX-Address	DMX-Mode
Acoustic Control	PAR 180 COB 3in1	LIGA.AIR.DMX.RGB-1	40	7CH RGB
American DJ	COB Cannon Wash	LIGA.AIR.DMX.RGB-1	1	4CH RGBA
American DJ	Mega Bar RGBA	LIGA.AIR.DMX.RGB-1	1	4CH RGBA
American DJ	Mega Hex Par	LIGA.AIR.DMX.RGBW-1	40	7CH RGBW
American DJ	Mega TRIPAR Profile	LIGA.AIR.DMX.RGB-1	1	3CH RGB
American DJ	Mega TRIPAR Profile Plus	LIGA.AIR.DMX.RGB-1	1	4CH RGBUV
American DJ	Saber Spot RGBW	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
ARRI	L5-C	LIGA.AIR.DMX.RGBW-1	4	5CH RGBW
ARRI	L7-C	LIGA.AIR.DMX.RGBW-1	4	5CH RGBW
ARRI	L10-C	LIGA.AIR.DMX.RGBW-1	4	5CH RGBW
ARRI	Skypanel S30C	LIGA.AIR.DMX.RGBW-1	30	9CH RGBW
ARRI	Skypanel S60C	LIGA.AIR.DMX.RGBW-1	30	9CH RGBW
ARRI	Skypanel S120C	LIGA.AIR.DMX.RGBW-1	30	9CH RGBW
ARRI	Skypanel S360C	LIGA.AIR.DMX.RGBW-1	30	9CH RGBW
BeamZ	BeamZ PLS25 Par	LIGA.AIR.DMX.RGBW-1	20	6CH RGBW
Big Dipper	Big Dipper LP001	LIGA.AIR.DMX.RGBW-2	1	8CH RGBW
Blizzard	Puck RGBAW	LIGA.AIR.DMX.RGBW-1	50	5CH RGBAW
Blizzard	RokBox RGBW	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
BoomToneDJ	SilentPAR 5x3W 3in1	LIGA.AIR.DMX.RGB-1	1	3CH RGB
BoomToneDJ	SilentPAR 7x3W 3in1	LIGA.AIR.DMX.RGB-1	1	3CH RGB
BoomToneDJ	SilentPAR 12x3W 3in1	LIGA.AIR.DMX.RGB-1	1	3CH RGB
BoomToneDJ	SilentPAR 5x10W 5in1	LIGA.AIR.DMX.RGBW-1	10	5CH RGBWA
BoomToneDJ	SilentPAR 7x10W 5in1	LIGA.AIR.DMX.RGBW-1	10	5CH RGBWA
BoomToneDJ	SilentPAR 12x10W 5in1	LIGA.AIR.DMX.RGBW-1	10	5CH RGBWA
BoomToneDJ	SilentPAR 5x10W 6in1	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
BoomToneDJ	SilentPAR 7x10W 6in1	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
BoomToneDJ	SilentPAR 12x10W 6in1	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Briteq	BEAMSPOT1-DMX FC	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Briteq	BT-COLORAY 18FCR	LIGA.AIR.DMX.RGBW-1	20	6CH RGBW
Briteq	BT-COLORAY 60R	LIGA.AIR.DMX.RGBW-1	20	6CH RGBW
Briteq	BT-COLORAY 120R	LIGA.AIR.DMX.RGBW-1	20	6CH RGBW
Briteq	BT-STAGEPAR 6in1	LIGA.AIR.DMX.RGBW-1	40	8CH RGBW
Briteq	COB Slim 100-RGB	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Briteq	PRO BEAMER ZOOM INDOOR	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Briteq	PRO BEAMER ZOOM OUTDOOR	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Cameo	Flat PAR Can RGB 10 IR	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Cameo	Flat PAR Can Tri 5x 3W IR	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Cameo	Flat PAR Can Tri 7x 3W IR	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Cameo	Flat Pro 18	LIGA.AIR.DMX.RGBW-1	10	5CH RGBWA
Cameo	Multi PAR COB 1	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Cameo	Outdoor PAR Tri 12	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Cameo	Zenit W600 (Outdoor)	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Chauvet DJ	COLORband PiX	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Chauvet DJ	COLORband PiX IP	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Chauvet DJ	EVE P-130 RGB	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Chauvet DJ	SlimPAR Pro H USB	LIGA.AIR.DMX.RGBW-1	50	6CH RGBAWU
Chauvet DJ	SlimPAR Pro QZ12	LIGA.AIR.DMX.RGB-1	1	5CH RGBA
Chauvet DJ	SlimPAR Q12 BT (BlueTooth + DMX)	LIGA.AIR.DMX.RGB-1	1	4CH RGBA
Chauvet DJ	SlimPAR T12 BT (BlueTooth + DMX)	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Chauvet Professional	COLORdash Batten-Quad 6	LIGA.AIR.DMX.RGB-1	1	4CH RGBA
Chroma-Q	Color Force II 12	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Chroma-Q	Color Force II 48	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Chroma-Q	Color Force II 72	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Cinetec	PAR 18x15W RGBWA	LIGA.AIR.DMX.RGBW-1	10	5CH RGBWA
Clay Paky	Show-Batten 100 (16 Bit RGBW)	LIGA.AIR.DMX.RGBW-2	30	8CH RGBW-16
CLF	Hera	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Contest	IrLEDFLAT 5x12SIXb	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU

Settings according to luminaire manufacturer and model (following)

Manufacturer	Model	Casambi Profile	DMX-Address	DMX-Mode
Elation	Design LED Par Zoom	LIGA.AIR.DMX.RGB-1	1	8CH RGB
Elation	SIXPAR 100	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Elation	SIXPAR 100IP	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Elation	SIXPAR 200	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Elation	SIXPAR 200 IP	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Elation	SIXPAR 200 WMG	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Elation	SIXPAR 300	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Elation	SIXPAR 300 IP	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Elation	SIXPAR 300 WMG	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Equinox	Gigabar	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Equinox	RGB Power Batten	LIGA.AIR.DMX.RGB-1	1	3CH RGB
ETC	ColorSource PAR	LIGA.AIR.DMX.RGB-1	1	3CH RGB
ETC	Source Four LED Series 2 Daylight HD	LIGA.AIR.DMX.RGB-1	1	6CH RGB
ETC	ColorSource PAR Deep Blue	LIGA.AIR.DMX.RGB-1	1	3CH RGB
ETC	ColorSource Spot	LIGA.AIR.DMX.RGB-1	1	3CH RGB
ETC	ColorSource Spot Deep Blue	LIGA.AIR.DMX.RGB-1	1	3CH RGB
ETC	Fos/4 PD8	LIGA.AIR.DMX.RGB-1	1	3CH RGB
ETC	Fos/4 PD16	LIGA.AIR.DMX.RGB-1	1	3CH RGB
ETC	Fos/4 PL8	LIGA.AIR.DMX.RGB-1	1	3CH RGB
ETC	Fos/4 PD24	LIGA.AIR.DMX.RGB-1	1	3CH RGB
ETC	Fos/4 PL16	LIGA.AIR.DMX.RGB-1	1	3CH RGB
ETC	Fos/4 PL24	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Eurolite	LED Bar-3 HCL Bar	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
ETC	Source Four LED Series 2 Lustr	LIGA.AIR.DMX.RGB-1	1	6CH RGB
Eurolite	LED Big PARTY Spot	LIGA.AIR.DMX.RGBW-1	20	6CH RGBW
ETC	Source Four LED Series 2 Tungsten HD	LIGA.AIR.DMX.RGB-1	1	6CH RGB
Eurolite	LED Big PARTY TCL Spot	LIGA.AIR.DMX.RGBW-1	20	5CH RGBW
Eurolite	LED ML-56 RGBW	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Eurolite	LED PAR-56 TCL	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Eurolite	LED PARTY Spot	LIGA.AIR.DMX.RGBW-1	20	6CH RGBW
Eurolite	LED PARTY TCL Spot	LIGA.AIR.DMX.RGB-1	10	5CH RGB
Eurolite	LED PIX-12 HCL	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Eurolite	LED PIX-144	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Eurolite	LED PS-4 HCL	LIGA.AIR.DMX.RGBW-1	40	10CH RGBW
Event Lighting	Par5x12	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Event Lighting	Par12x12	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Evolight	Colours Archspot 54 RGB	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Eyournlife	LED RGBW 54x3 Par64	LIGA.AIR.DMX.RGBW-1	30	8CH RGBW
Flash Professional	LED PAR 64 COB 300W RGBWAUV	LIGA.AIR.DMX.RGBW-2	10	8CH RGBW
Flash Professional	LED PAR 64 SLIM 7x10W RGBW Mk2	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Fractal Lights	PAR LED 7x9W	LIGA.AIR.DMX.RGBW-1	10	5CH RGBWA
Fractal Lights	PAR LED 7x10W	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Fractal Lights	PAR LED 7x12W	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Fun Generation	LED Pot 12x1W RGBW	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Fun Generation	SePar Quad LED RGB UV	LIGA.AIR.DMX.RGB-1	1	4CH RGBU
Fun Generation	SePar Quad LED RGBW	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Futurelight	PRO Slim PAR-7 HCL	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Gantom	Gantom Precision DMX	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Gear4Music	SOL-PARTY-12	LIGA.AIR.DMX.RGBW-1	1	8CH RGBW
Ghost	IP Spot Pro	LIGA.AIR.DMX.RGBW-1	30	9CH RGBW
Ghost	IP Spot Bat	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Ibiza light	LED PAR CAN 12x3W 3-in-1 RGB	LIGA.AIR.DMX.RGB-1	30	7CH RGB
Ibiza light	LP64 LED-PROMO	LIGA.AIR.DMX.RGB-1	10	7CH RGB
Ibiza light	LS-005LED	LIGA.AIR.DMX.RGB-1	30	4CH RGB
Ignition	Ignition LED Accu PAR	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
LaluceNatz	LaluceNatz 18LEDs Par Light	LIGA.AIR.DMX.RGB-1	30	4CH RGB
LEDJ	Slimline 12Q5 RGBA	LIGA.AIR.DMX.RGB-1	1	4CH RGBA
LEDJ	Slimline 12Q5 RGBW	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Mark	MBAR 381 IP	LIGA.AIR.DMX.RGB-1	30	4CH RGB
Mark	SUPERBAT LED 72	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU

Settings according to luminaire manufacturer and model (following)

Manufacturer	Model	Casambi Profile	DMX-Address	DMX-Mode
Martin	Stagebar 54L	LIGA.AIR.DMX.RGBW-1	50	5CH RGBAW
Martin	Stagebar 54S	LIGA.AIR.DMX.RGBW-1	50	5CH RGBAW
Martin	Rush PAR 2 RGBW Zoom	LIGA.AIR.DMX.RGBW-1	10	5CH RGBW
Mega LED Lighting	Lighting LED PAR Light-372	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Nicols	LED BAR 123 FC IP	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Orion Effects	Lighting ORCAN2	LIGA.AIR.DMX.RGB-1	40	7CH RGB
Prolights	PIXPAN16	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Prolights	SMARTBAT	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Rockville	Rockville RockPAR50	LIGA.AIR.DMX.RGB-1	1	3CH RGB
SGM	SGM P-5	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Shehds	LED Flat Par 12x3W RGBW	LIGA.AIR.DMX.RGBW-1	30	8CH RGBW
Shehds	LED Flat Par 7x18W RGBWA+UV Light	LIGA.AIR.DMX.RGBW-1	30	9CH RGBW
Shehds	LED Zoom Par 18x12W RGBW	LIGA.AIR.DMX.RGBW-1	30	10CH RGBW
Showline	SL ePAR 180 IP20	LIGA.AIR.DMX.RGBW-2	20	10CH RGBW
Showline	SL PUNCHLITE 220	LIGA.AIR.DMX.RGBW-2	1	8CH RGBW
ShowPRO	Litebar H9	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Showtec	Club PAR 12/4 RGBW	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Showtec	Compact Par 18	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Showtec	Compact Par 7 Tri	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Showtec	LED Light Bar RGB V3	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Showtec	Pixel Bar 12 MKII	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Solaris	SMART 36	LIGA.AIR.DMX.RGB-1	30	6CH RGB
Solena	Max Par 20	LIGA.AIR.DMX.RGB-1	30	7CH RGB
Solena	Mini Par 12	LIGA.AIR.DMX.RGBW-1	10	5CH RGBW
Stairville	LED Bar 240/8	LIGA.AIR.DMX.RGB-1	10	5CH RGB
Stairville	PAR 56	LIGA.AIR.DMX.RGB-1	50	5CH RGB
Stairville	Revue LED 120 COB RGBWW	LIGA.AIR.DMX.RGB-1	20	7CH RGB
Stairville	Stage TRI LED	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Starway	SticKolor 1210UHD	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Varytec	BAT.PAR 6 RGBUV	LIGA.AIR.DMX.RGB-1	1	4CH RGBU
Varytec	BAT.PAR 6 RGBWA	LIGA.AIR.DMX.RGBW-1	10	5CH RGBWA
Venue	ThinTri64	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Martin	Stagebar 54L	LIGA.AIR.DMX.RGBW-1	50	5CH RGBAW
Martin	Stagebar 54S	LIGA.AIR.DMX.RGBW-1	50	5CH RGBAW
Martin	Rush PAR 2 RGBW Zoom	LIGA.AIR.DMX.RGBW-1	10	5CH RGBW
Mega LED Lighting	Lighting LED PAR Light-372	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Nicols	LED BAR 123 FC IP	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Orion Effects	Lighting ORCAN2	LIGA.AIR.DMX.RGB-1	40	7CH RGB
Prolights	PIXPAN16	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Prolights	SMARTBAT	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Rockville	Rockville RockPAR50	LIGA.AIR.DMX.RGB-1	1	3CH RGB
SGM	SGM P-5	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Shehds	LED Flat Par 12x3W RGBW	LIGA.AIR.DMX.RGBW-1	30	8CH RGBW
Shehds	LED Flat Par 7x18W RGBWA+UV Light	LIGA.AIR.DMX.RGBW-1	30	9CH RGBW
Shehds	LED Zoom Par 18x12W RGBW	LIGA.AIR.DMX.RGBW-1	30	10CH RGBW
Showline	SL ePAR 180 IP20	LIGA.AIR.DMX.RGBW-2	20	10CH RGBW
Showline	SL PUNCHLITE 220	LIGA.AIR.DMX.RGBW-2	1	8CH RGBW
ShowPRO	Litebar H9	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Showtec	Club PAR 12/4 RGBW	LIGA.AIR.DMX.RGBW-1	10	4CH RGBW
Showtec	Compact Par 18	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Showtec	Compact Par 7 Tri	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Showtec	LED Light Bar RGB V3	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Showtec	Pixel Bar 12 MKII	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Solaris	SMART 36	LIGA.AIR.DMX.RGB-1	30	6CH RGB
Solena	Max Par 20	LIGA.AIR.DMX.RGB-1	30	7CH RGB
Solena	Mini Par 12	LIGA.AIR.DMX.RGBW-1	10	5CH RGBW

Settings according to luminaire manufacturer and model (following)

Manufacturer	Model	Casambi Profile	DMX-Address	DMX-Mode
Stairville	LED Bar 240/8	LIGA.AIR.DMX.RGB-1	10	5CH RGB
Stairville	PAR 56	LIGA.AIR.DMX.RGB-1	50	5CH RGB
Stairville	Revue LED 120 COB RGBWW	LIGA.AIR.DMX.RGB-1	20	7CH RGB
Stairville	Stage TRI LED	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Starway	SticKolor 1210UHD	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Varytec	BAT.PAR 6 RGBUV	LIGA.AIR.DMX.RGB-1	1	4CH RGBU
Varytec	BAT.PAR 6 RGBWA	LIGA.AIR.DMX.RGBW-1	10	5CH RGBWA
Venue	ThinTri64	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Stairville	LED Bar 240/8	LIGA.AIR.DMX.RGB-1	10	5CH RGB
Stairville	PAR 56	LIGA.AIR.DMX.RGB-1	50	5CH RGB
Stairville	Revue LED 120 COB RGBWW	LIGA.AIR.DMX.RGB-1	20	7CH RGB
Stairville	Stage TRI LED	LIGA.AIR.DMX.RGB-1	1	3CH RGB
Starway	SticKolor 1210UHD	LIGA.AIR.DMX.RGBW-1	10	6CH RGBWAU
Varytec	BAT.PAR 6 RGBUV	LIGA.AIR.DMX.RGB-1	1	4CH RGBU
Varytec	BAT.PAR 6 RGBWA	LIGA.AIR.DMX.RGBW-1	10	5CH RGBWA
Venue	ThinTri64	LIGA.AIR.DMX.RGB-1	1	3CH RGB

In the case of DMX lights with color channels such as ultraviolet (UV) or amber etc. that are outside the operating area (RGBW) of Casambi or other function channels such as strobe etc., these channels are automatically switched off in the DMX protocol.

The DMX mode describes the data format of the light, which may have to be set in the DMX light. The DMX address is the start address of the lamp, which must also be set in the DMX lamp.

View of the Casambi profiles RGB vs RGBW

LIGA.AIR.DMX.RGB	LIGA.AIR.DMX.RGBW