


13099006

Polycarbonate enclosure 385x385x193 for ATyS M 40-125A

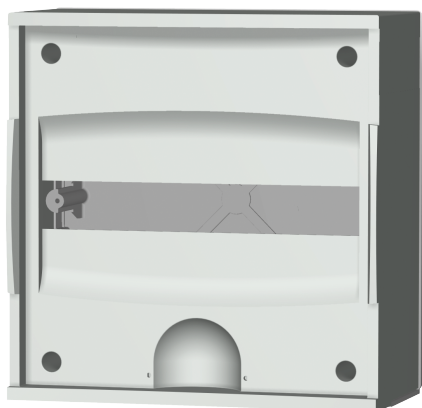

Dedicated to the installation of a three-phase ATyS M, it enables easy integration of a compact transfer switch solution.

Access to resources (ex: manuals)

Technical Characteristics

| | |
|---------------------------------|----------------|
| Length of the product unit [mm] | 385 |
| Width of the product unit [mm] | 385 |
| Depth of the product unit [mm] | 193 |
| Weight [kg] | 5.89 |
| Depth [mm] | 193 |
| Height [mm] | 385 |
| Model | Enclosure IP65 |
| Width [mm] | 385 |

Classification

| | |
|------------|----------|
| UNSPSC | 39122205 |
| ETIM Class | EC000261 |
| IGCC | 5177 |

Commerce

| | |
|-----------------------|------------|
| Effective date | 2006-11-09 |
| Offer Life Cycle Code | 40 |
| Country of origin | FR |

ETIM - Mechanical characteristics

| | |
|-----------------------------------|-----------|
| Width [mm] | 385 |
| Height [mm] | 385 |
| Depth [mm] | 193 |
| Material | Plastic |
| Material quality | Other |
| Surface finishing | Untreated |
| Colour | Grey |
| RAL-number | 7035 |
| With glazed door | No |
| With ventilation door | No |
| With rear door | No |
| Suitable for outdoor installation | No |
| Pitched roof | No |
| Degree of protection (IP) | IP41 |

ETIM - Technical features

| | |
|---------------------------------|-----|
| Freestanding | Yes |
| Floor standing wall model | No |
| Suitable for wall mounting | Yes |
| Couplable | No |
| With mounting plate | Yes |
| Mounting plate depth-adjustable | No |
| Suitable for wall built-in | Yes |
| EMC-version | No |

Logistics

| | |
|----------------|---------------|
| GTIN/EAN | 3596031854561 |
| Customs number | 8538100000 |
| Price unit | PC |

| | |
|---------------------------------|-------|
| Weight of the packing unit [kg] | 5.89 |
| Length of the packing unit [m] | 0.015 |
| Width of the packing unit [m] | 0.115 |
| Depth of the packing unit [m] | 0.2 |