



Circuit breaker box



Mi 1331

- 36 modules: 2 x 18 x 18 mm
- without PE and N terminal




- 2-row
- for installation of DIN rail equipment in accordance with DIN 43880
- order PE/N terminals separately
- with blanking strips for unused DIN rail openings
- lid fasteners for hand operation
- material: PC (polycarbonate)
- protection class: II
- colour: grey, RAL 7035


| | |
|--------|---------|
| width | 450 mm |
| height | 300 mm |
| depth | 170 mm |
| weight | 3,94 kg |

Drawings

Dimension drawing

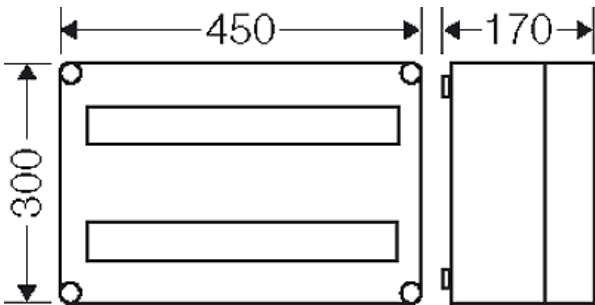


Box walls

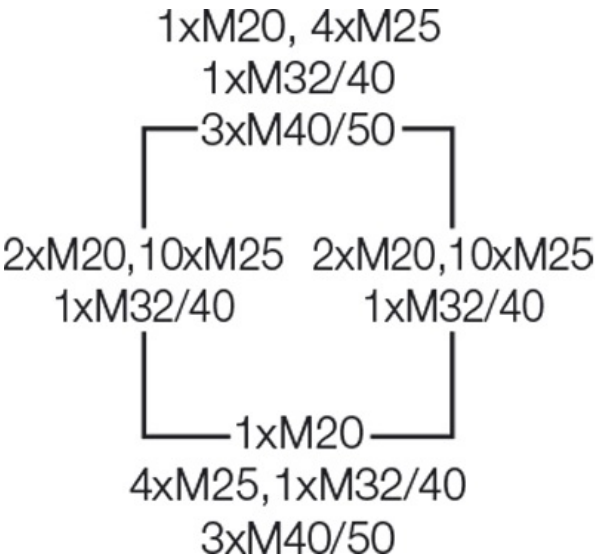

Operating and ambient conditions


| | |
|------------------|---|
| Application area | Suitable for indoor installation and outdoor installation, protected against weather influences However, pay attention to the climatic effects on the installed equipment , for example, high or low ambient temperatures or |
|------------------|---|

Circuit breaker box



Mi 1331

- 36 modules: 2 x 18 x 18 mm
- without PE and N terminal



| | |
|--|--|
| | formation of condensed water see technical information |
| Resistant to occasional cleaning procedures (direct jet) | Resistance to occasional cleaning procedures (direct jet) with high-pressure cleaner without cleaning additives, water pressure: max 100 bar, water temperature: Max. 80° C, distance => 0.15 m, in accordance with IP 69 requirements, single enclosure without lid equipment (no enclosure assembly), enclosure and cable glands at least IP 65. |
| Ambient temperature | Average value over 24 hours + 35 °C Maximum value + 40 °C Minimum value - 5 °C |
| Relative humidity | 50% at 40° C short-time 100% at 25° C |
| Fire protection in the event of internal faults | Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position |
| Burning behaviour | Glow wire test IEC 60695-2-11: 960 °C UL Subject 94: V-2 flame-retardant self-extinguishing |
| Degree of protection against mechanical load | IK08 (5 Joule) |
| Toxic behaviour | halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60754-2 |
| Note: | For material properties see technical data. |