




## DATA SHEET

### residual current circuit-breaker

**DFS 4 080-4/0,30-B SK**

**AC/DC sensitive type B**

**Article number 09156998**



#### Function

Residual current circuit-breakers (RCCBs) are components for implementing protective measure "Automatic disconnection of the power supply" as per VDE 0100 part 410 or corresponding international installation regulations. Series DFS 4 devices are compact two or four-pole residual current circuit-breakers. In the standard design, they only take up four module width units of space. Although DFS 4 devices for AC and pulsating DC residual currents are actually designed for three-phase networks, they can also be used in single-phase networks. However, in addition to these, special variants are also available for single or three-phase operation in the form of the AC/DC sensitive designs (type B, type B+). In spite of the compact dimensions, a number of different tripping currents and characteristics are available at rated currents, depending on the design, up to 125 A. They also have large two-tier terminals for large conductor cross-sections, a practical multi-functional switch toggle and can be provided with labels using free-of-charge software. Type B residual current circuit-breakers detect smooth DC residual currents and all other residual currents at frequencies up to 150,000 Hz. The operating voltage required for this is taken from the mains supply. Correct power supply is ensured when the voltage between the mains conductors is  $\geq 50$  V. Pulsating and AC residual currents are detected independent of the mains voltage. For residual current circuit-breakers with characteristic curve SK, the frequency response of the tripping current is designed so that residual currents with high frequencies, such as in the clock frequency range for frequency converters, as opposed to the rated frequency are detected with significantly reduced sensitivity. Undesired trips caused by leakage currents can therefore be widely avoided. However, fire protection depending on the rated residual current of the switch (0.03 A, 0.1 A or 0.3 A) is only provided for residual currents with frequencies up to 1 kHz, 300 Hz or 100 Hz, while the devices with tripping current frequency response B+ or NK offer protection over the entire tripping frequency range up to 20 kHz or 150 kHz, respectively. Devices in the standard design are intended for monitoring circuits with a rated voltage of 230, 400 V, V and a rated frequency of 50 Hz.

#### Features

High level of immunity against leakage and residual currents due to operational conditions from frequency 1 kHz and higher, AC/DC sensitive for residual currents with frequencies and mixed frequencies of 0 Hz (smooth direct current) up to 150 kHz, high availability even of voltage-independent detection of smooth DC residual current and AC residual current with frequencies not equal to 50/60 Hz thanks to full functional compatibility with mains voltages from at least 50 V AC on any two active conductors, mains-voltage-independent tripping when type A residual currents occur, compact design for all rated currents, high short-circuit resistance, double-sided two-tier terminals for large conductor cross-section and busbar, switch position indicator, viewing window for labels, multifunction switch toggle with three positions: "on", "off" and "tripped", Neutral conductor position left

#### Mounting

quick fastening to mounting rail, any installation position, supply preferably from above

#### Applications

Commercial and industrial installations with TT, TN-S and TN-C-S systems, where power electronics equipment is used without galvanic isolation from the mains, e.g. frequency converters, switching power supplies, high-frequency converters, photovoltaic installations and UPS equipment with frequency converters without transformers.

#### Notes

suitable for use in 50 Hz AC networks, RCCBs for other frequencies available upon request, Not designed for use in direct current networks or on the output side of controlled electrical equipment such as frequency converters.

#### Accessories

automatic reclosing devices DFA, terminal caps KA, information stickers HAS, auxiliary switches DHi, restart locks DFS WES, software DBS


Technical Data

| Technical Data                                          | DFS 4 080-4/0,30-B SK                                                                                   |
|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Series                                                  | DFS 4 B SK                                                                                              |
| Number of poles                                         | 4                                                                                                       |
| Residual current type                                   | B                                                                                                       |
| Tripping characteristic curve                           | SK                                                                                                      |
| Rated current (AC)                                      | 80 A                                                                                                    |
| Rated residual current I $\Delta$ n                     | 0.3 A                                                                                                   |
| Short-time delayed                                      | true                                                                                                    |
| Selective                                               | false                                                                                                   |
| min. Operating voltage range of test circuit            | 200 V                                                                                                   |
| max. Operating voltage range of test circuit            | 440 V                                                                                                   |
| Minimum rated operating voltage (Type A/AC operation)   | 0 V AC                                                                                                  |
| Minimum rated operating voltage (Type B operation)      | 50 V AC                                                                                                 |
| Non-trip time                                           | 10 ms                                                                                                   |
| Tripping frequency                                      | 0 Hz ... 150 kHz                                                                                        |
| Maximum disconnection times                             | 1 · I $\Delta$ n: ≤ 300 ms; 5 · I $\Delta$ n: ≤ 40 ms                                                   |
| Internal consumption                                    | max. 2.2 W                                                                                              |
|                                                         | load circuit                                                                                            |
| Specification                                           | load disconnect contact                                                                                 |
| min. Contact opening                                    | 4 mm                                                                                                    |
| Rated voltage (AC)                                      | 230 V, 400 V                                                                                            |
| Rated current (AC)                                      | 80 A                                                                                                    |
| Rated short-circuit current                             | 10 kA                                                                                                   |
| Surge current strength                                  | 3 kA                                                                                                    |
| max. total rated switching capacity                     | 800 A                                                                                                   |
| Rated insulation voltage                                | 400 V                                                                                                   |
| Rated impulse withstand voltage                         | 4 kV                                                                                                    |
| Rated frequency                                         | 50 Hz                                                                                                   |
| Current heat loss per current path                      | 5 W                                                                                                     |
| thermal Backup-fuse OCPD                                | 80 A                                                                                                    |
| short-circuit backup-fuse SCPD                          | 125 A                                                                                                   |
| Back-up fuse type                                       | gG                                                                                                      |
|                                                         | screw-type terminal top and bottom (load circuit)                                                       |
| Neutral conductor position                              | left                                                                                                    |
| Protection against direct contact                       | DGUV V3, VDE 0660-514, finger and back-of-hand proof                                                    |
| Connection C1 Maximum number of conductors per terminal | 2 (conductors of same type and cross-section)                                                           |
| Cross section solid                                     | 1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Connecting capacity flexible                            | 1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Cross section stranded                                  | 1-wire: 1.5 mm <sup>2</sup> ... 50 mm <sup>2</sup> ; 2-wire: 1.5 mm <sup>2</sup> ... 16 mm <sup>2</sup> |
| Cross section AWG, solid                                | 15 ... 1                                                                                                |
| Cross section AWG, stranded                             | 15 ... 1                                                                                                |
| Cross section AWG, flexible                             | 15 ... 1                                                                                                |

Subject to technical changes


| Technical Data                            | DFS 4 080-4/0,30-B SK                                                            |
|-------------------------------------------|----------------------------------------------------------------------------------|
| Cross section AWG, flexible with ferrule  | 15 ... 1                                                                         |
| Tightening torque                         | 2.5 Nm ... 3 Nm                                                                  |
|                                           | General data                                                                     |
| Operating position                        | optional                                                                         |
| max. Operating altitude above MSL         | 2000 m                                                                           |
| Mechanical endurance                      | min. 5000 cycles                                                                 |
| Electrical endurance                      | min. 2000 cycles                                                                 |
| Surrounding atmosphere                    | normal environmental conditions                                                  |
| Storage temperature                       | -35 °C ... 75 °C                                                                 |
| Ambient temperature                       | -25 °C ... 40 °C                                                                 |
| Climate resistance                        | according to IEC 60068-2-30: humid heat / cyclic (25 °C / 55 °C; 93 % / 97 % RH) |
| Shock resistance                          | 20 g / 20 ms Duration                                                            |
| Fatigue limit                             | > 5 g (f ≤ 80 Hz, duration > 30 min.)                                            |
| Housing type                              | distribution board housing                                                       |
| Installation type                         | Mounting rail (35 mm)                                                            |
| Housing material                          | thermoplastic                                                                    |
| Protection class                          | IP20 (installed: IP40)                                                           |
| sealable                                  | true                                                                             |
| Width                                     | 72 mm                                                                            |
| Height                                    | 85 mm                                                                            |
| Depth                                     | 75 mm                                                                            |
| Installation depth                        | 69 mm                                                                            |
| Module widths                             | 4                                                                                |
| Design requirements/Standards             | VDE 0664-10, VDE 0664-40, ÖVE/ÖNORM E 8601, DIN EN 61008-1, EN 62423             |
| Degree of pollution according to EN 60664 | 2                                                                                |
| Certifications                            | VDE                                                                              |

## Dimensions

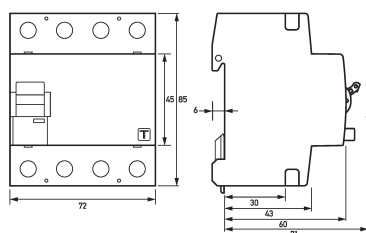


Dimensional drawing Group view

## Wiring example



Wiring diagram

## Diagrams

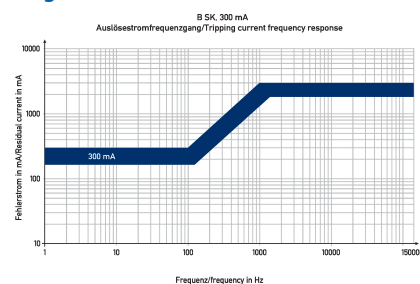

Characteristic B SK 300 mA