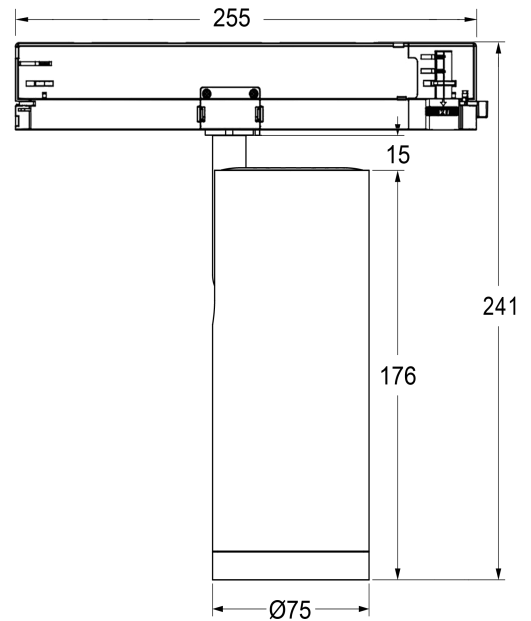


# HYRO A10 Series LED Track Light

HYRO A1075A (CAC)

5 years  
WarrantyFlicker  
Free

## Product description

LED track light 20W


High CRI, Tunable White 2700~6500K

Zoomable lens beam angle 15~55 degree

Indoor lighting

## Mounting Type

4 wire 3-phase track

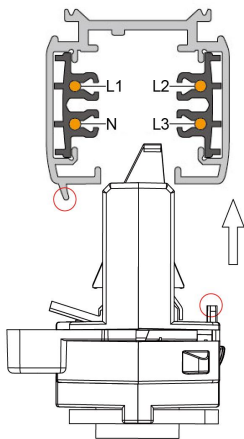

## General

Model NO.: HYRO A1075A (CAC)

Color of finishing: White/Black

IP Rating: IP20

Luminous flux(±10%): 2700K CRI&gt;Ra90, 1400lm

3000K CRI&gt;Ra90, 1500lm

4000K CRI&gt;Ra90, 1600lm

## LED

CCT: Tunable White 2700~6500K

CRI&gt;Ra90

Initial MacAdam: ≤3 SDCM

LED Brand: Customized COB SANAN chip

## Optical

Optic material: PC lens

Beam angle: 15~55° zoom

## Electrical

Dimming method: Casambi app

Dimming range: 1~100%

LED driver brand: CE driver

Input voltage: 220~240V~50/60Hz

Load wattage: 20W

Power factor: &gt;0.9

Working temperature: -20~40°C

Protection: Class II

## Physical

Diameter: 75mm

Height: 176mm

Tilt max: 120°

Rotation: 360°

Housing material: aluminium

Finishing: powder coated

## Package

12PCS 14.4kg/CTN 57.7x37.6x34cm V18.1

Features



Light distributions

A1075A 20W 2700K Ra90 15D



| Flux out:835.7 lm |               |                |          |
|-------------------|---------------|----------------|----------|
| Height            | Eavg,Emax     | Angle:19.28deg | Diameter |
| 0.5m              | 34225,483061x |                | 16.99cm  |
| 1m                | 8556,120761x  |                | 33.98cm  |
| 1.5m              | 3803,53671x   |                | 50.96cm  |
| 2m                | 2139,30191x   |                | 67.95cm  |
| 2.5m              | 1369,19321x   |                | 84.94cm  |
| 3m                | 950.7,13421x  |                | 101.93cm |
| 3.5m              | 698.5,985.81x |                | 118.91cm |
| 4m                | 534.8,754.81x |                | 135.90cm |
| 5m                | 342.3,483.11x |                | 169.88cm |
| 6m                | 237.7,335.51x |                | 203.85cm |

A1075A 20W 3000K Ra90 15D



| Flux out:869.0 lm |               |                |          |
|-------------------|---------------|----------------|----------|
| Height            | Eavg,Emax     | Angle:19.37deg | Diameter |
| 0.5m              | 35586,503171x |                | 17.07cm  |
| 1m                | 8897,125791x  |                | 34.14cm  |
| 1.5m              | 3954,55911x   |                | 51.21cm  |
| 2m                | 2224,31451x   |                | 68.27cm  |
| 2.5m              | 1423,20131x   |                | 85.34cm  |
| 3m                | 988.5,13981x  |                | 102.41cm |
| 3.5m              | 726.2,10271x  |                | 119.48cm |
| 4m                | 556.0,786.21x |                | 136.55cm |
| 5m                | 355.9,503.21x |                | 170.69cm |
| 6m                | 247.1,349.41x |                | 204.82cm |

A1075A 20W 4000K Ra90 15D



| Flux out:910.4 lm |               |                |          |
|-------------------|---------------|----------------|----------|
| Height            | Eavg,Emax     | Angle:19.42deg | Diameter |
| 0.5m              | 37283,526551x |                | 17.11cm  |
| 1m                | 9321,131641x  |                | 34.23cm  |
| 1.5m              | 4143,58511x   |                | 51.34cm  |
| 2m                | 2330,32911x   |                | 68.45cm  |
| 2.5m              | 1491,21061x   |                | 85.57cm  |
| 3m                | 1036,14631x   |                | 102.68cm |
| 3.5m              | 760.9,10751x  |                | 119.79cm |
| 4m                | 582.5,822.71x |                | 136.91cm |
| 5m                | 372.8,526.51x |                | 171.14cm |
| 6m                | 258.9,365.71x |                | 205.36cm |

● For other options or original test report, please contact our sales team.

All technical data is subject to industry-standard tolerances.

HYRWELL LIGHT CO., LIMITED

Address: 3F, F-Building, Zhixuanhan Industria park, Bao'an,  
Shenzhen 518108, China  
Tel: +0086-755-29401458 Mob: +0086-186 8893 8813  
Email: info@hyrwell.com Web: www.hyrwell.com