


## Supply busbars, entry terminals

"standard" distribution

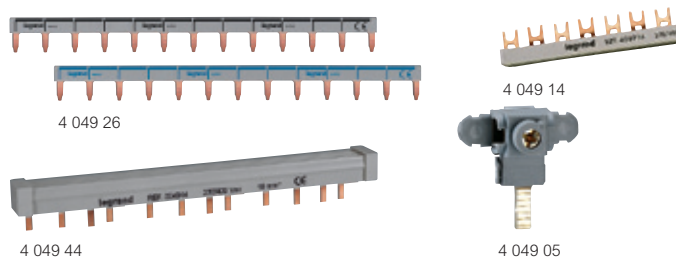

| Pack | Cat.Nos               | Prong-type supply busbars                    |                                  |
|------|-----------------------|----------------------------------------------|----------------------------------|
|      |                       | <b>Universal single pole + neutral</b>       |                                  |
|      |                       | Reversible: blue for neutral, black for live |                                  |
|      |                       | Length                                       | Max. number of devices connected |
| 20   | 4 049 26              | 1 row                                        | 13                               |
| 10   | 4 049 37              | Meter                                        | 57                               |
|      |                       |                                              |                                  |
|      |                       | <b>Double pole</b>                           |                                  |
| 50   | 4 049 38 <sup>1</sup> | 1 row                                        | 6                                |
| 10   | 4 049 39              | Meter                                        | 28                               |
|      |                       |                                              |                                  |
|      |                       | <b>Double pole balanced on 3 phases</b>      |                                  |
| 3    | 4 049 40 <sup>1</sup> | 1 row                                        | 6                                |
| 10   | 4 049 41              | Meter                                        | 28                               |
|      |                       |                                              |                                  |
|      |                       | <b>Triple pole</b>                           |                                  |
| 40   | 4 049 42 <sup>1</sup> | 1 row                                        | 4                                |
| 10   | 4 049 43              | Meter                                        | 19                               |
|      |                       |                                              |                                  |
|      |                       | <b>Four pole</b>                             |                                  |
| 30   | 4 049 44              | 1 row                                        | 3                                |
| 10   | 4 049 45              | Meter                                        | 14                               |
|      |                       |                                              |                                  |

|    |          |                                 |                                  |
|----|----------|---------------------------------|----------------------------------|
|    |          | <b>Fork-type supply busbars</b> |                                  |
|    |          | <b>Single pole</b>              |                                  |
|    |          | Length                          | Max. number of devices connected |
| 20 | 4 049 11 | 1 row                           | 12                               |
| 10 | 4 049 12 | Meter                           | 57                               |
|    |          |                                 |                                  |
|    |          | <b>Double pole</b>              |                                  |
| 10 | 4 049 14 | Meter                           | 28                               |
|    |          |                                 |                                  |
|    |          | <b>Triple pole</b>              |                                  |
| 5  | 4 049 17 | 1 row                           | 4                                |
| 10 | 4 049 18 | Meter                           | 19                               |
|    |          |                                 |                                  |
|    |          | <b>Four pole</b>                |                                  |
| 10 | 4 049 20 | Meter                           | 14                               |
|    |          |                                 |                                  |

|    |          |                                            |  |
|----|----------|--------------------------------------------|--|
|    |          | <b>Protection</b>                          |  |
|    |          | <b>Protection of prongs</b>                |  |
| 20 | 4 049 88 | 12 modules<br>Can be cut to length         |  |
|    |          | <b>Protection of supply busbar ends</b>    |  |
| 40 | 4 049 89 | For single pole/single pole + neutral      |  |
| 20 | 4 049 90 | For double pole length 1 m and triple pole |  |
| 20 | 4 049 91 | For four-pole                              |  |
|    |          |                                            |  |

|    |          |                                                                                                                        |  |
|----|----------|------------------------------------------------------------------------------------------------------------------------|--|
|    |          | <b>Entry terminals</b>                                                                                                 |  |
| 20 | 4 049 05 | For universal single pole + neutral<br>or single pole supply busbars<br>Cross section: 4 to 25 mm <sup>2</sup> - IP 2X |  |
| 20 | 4 049 06 | For all supply busbars<br>Cross section: 6 to 35 mm <sup>2</sup>                                                       |  |
|    |          |                                                                                                                        |  |

1: Filled with end protection

## Supply busbars, entry terminals

"standard" distribution


### Technical characteristics

|                                      | Busbars type | Max number of devices connected | Length in number of 17.5 mm modules | Cross section (mm <sup>2</sup> ) | 1 central power supply point | 2 power supply point |
|--------------------------------------|--------------|---------------------------------|-------------------------------------|----------------------------------|------------------------------|----------------------|
| Single pole or Single pole + neutral | 1 row        | 13                              | 13                                  | 16 <sup>2</sup>                  | 80                           | 100                  |
|                                      | Meter        | 57                              | 57                                  |                                  |                              |                      |
| Double pole                          | 1 row        | 6                               | 12                                  | 10 <sup>2</sup>                  | 63                           | 90                   |
|                                      | Meter        | 28                              | 56                                  |                                  |                              |                      |
| Double pole balanced on 3-phases     | 1 row        | 6                               | 12                                  | 10 <sup>2</sup>                  | 63                           | 90                   |
|                                      | Meter        | 28                              | 56                                  |                                  |                              |                      |
| Triple pole                          | 1 row        | 4                               | 12                                  | 10 <sup>2</sup>                  | 63                           | 90                   |
|                                      | Meter        | 19                              | 57                                  |                                  |                              |                      |
| Four pole                            | 1 row        | 3                               | 12                                  | 10 <sup>2</sup>                  | 63                           | 90                   |
|                                      | Meter        | 14                              | 56                                  |                                  |                              |                      |

### Use of supply busbars

#### Universal single phase + neutral



- blue for neutral
- black for live

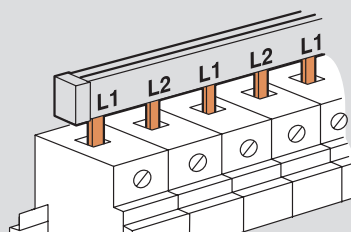

#### Entry terminal

Power supply at the rear of the busbar  
For all devices with moving cage terminals

Power supply at the front of the busbar  
For all devices with fixed cage terminals

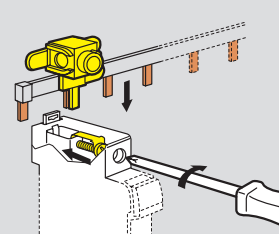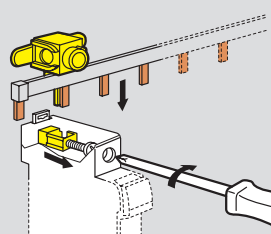

#### Four pole busbar

