


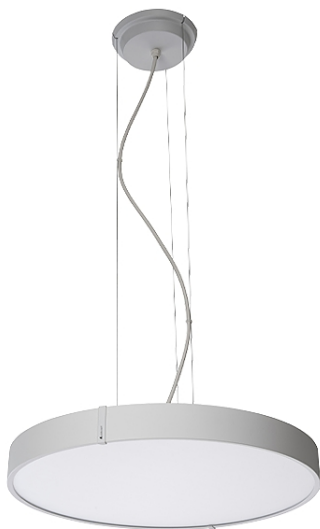

Kvill PE D550 MP 25W 3400 ActiveAhead-2 830 White

Article number 24618303456

Product feature	
User interface	ActiveAhead
Technology	BT Mesh
Driver type	DALI-2
Sensor type	PIR
Material of housing	Aluminium
Material of diffuser/optics	Acrylic (PMMA)
Diffuser/optics	Opal; Microprismatic
Light source	Integrated LED
Color of housing	White
RAL	9016

Photometric data	
Color T (K)	3000
Color Rendering Index (CRI)	≥80
Beam angle (°)	100
Beam description	Wide
Unified Glare Rating (UGR)	≤19
Efficacy (lm/W)	129
Flux (lm)	3230
SDCM	≤3

Installation data	
Mounting	Pendent
Cable entries	3
Connection	Terminal block 5x2.5
Looping	Yes
Length cable (m)	5

Frequency (Hz) 0/50-60

Voltage (V)	220-240
--------------------	---------

Isolation Class 1

Power (W)	25
-----------	----

Standby power (W) 0.5

Type Of Connection	Without cable
1. Direct connection	
2. Indirect connection	
3. Hybrid connection	

Qty per B16 MCB 33

Qty per C10 MCB 34


Qty per C16 MCB 56

Power factor ≥ 0.90

Height/depth (mm) 89

Diameter (mm)	550
----------------------	-----

Net weight (kg)	7.5
------------------------	-----

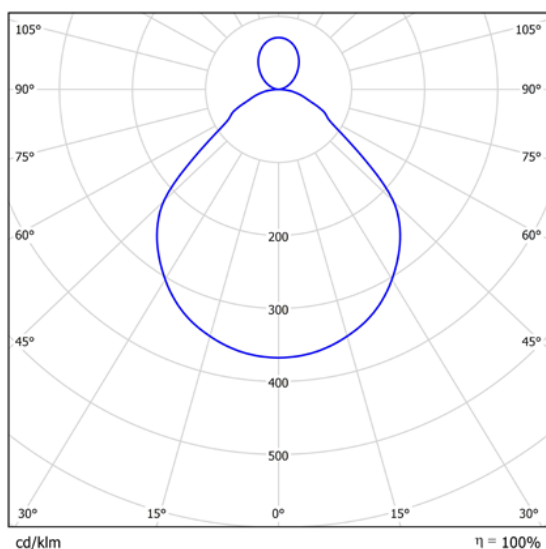

IP class IP20

IK class IK03

Ambient temp, min (+10 °C)

Ambient temp, max (°C) +30

Calculated LED lifetime, L70 (h) > 100 000

Calculated LED
lifetime, L80 (h) 100 000

Driver lifetime (h) 100 000

Compliance CE; REACH

