


## Cable entry via elastic membranes

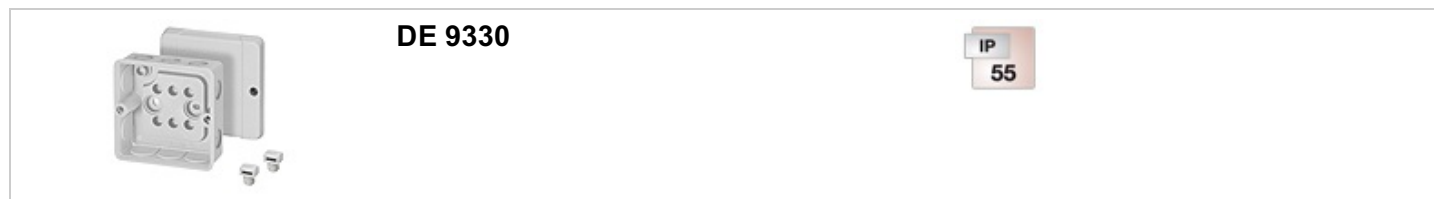


- without terminals
- 10 elastic membranes, closed cable entries, sealing range Ø 6.5-16 mm
- with cable retention (2 pc.) for cable tie up to 6.5 mm width
- colour: grey, RAL 7035
- for normal environment and protected outdoor


material	PS (Polystyrene)
Degree of protection:	IP 55
mounting width	59 mm
mounting height	76 mm
max. installation depth	33 mm
width	88 mm
height:	88 mm
depth	47 mm
Weight	0,096 kg
in accordance with	IEC 60 670-22

## Drawings

Dimension drawing

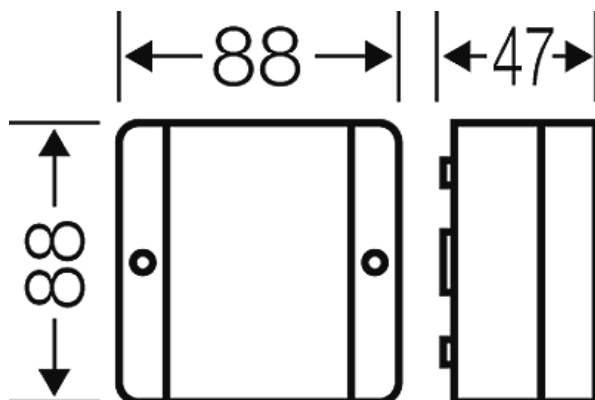


Detail mass

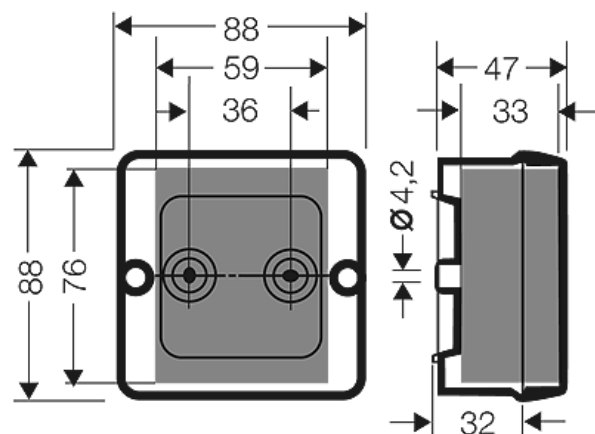

### Cable entry via elastic membranes



Box walls

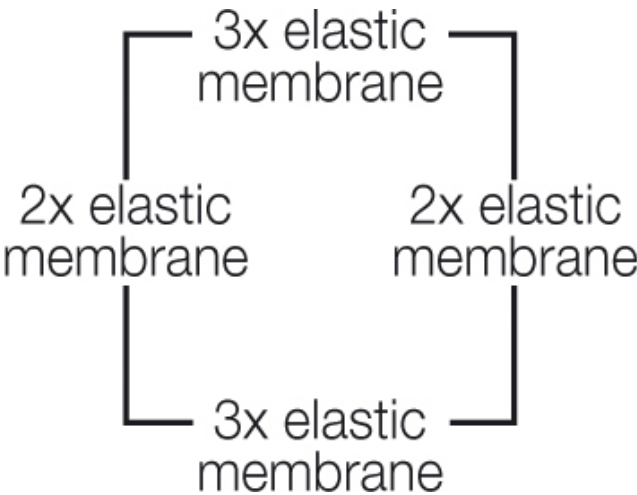

### Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Ambient temperature	Maximum value + 40 °C Minimum value - 25 °C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK07 (2 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60 754-2
Note:	For material properties see technical data.