

domestic fuse carriers




 Dimensions (p. 159)

With label-holders
With insulated carrier class II, padlockable
Coupling via supply busbars
Shielded terminals capacity 2 x 10 mm²
Possibility to signal indicator blown fuse
Fuse not supplied

Pack	Cat.Nos	For domestic cylindrical cartridge fuses		
		Conform to EN 60269-3 and IEC 60269-3 and 60269-3.1		
		Single pole		
		For domestic cartridges	Cartridge dimensions (mm)	Number of modules
10	058 10	10 A - 230 V~	8.5 x 23	1
10	058 11	16 A	10.3 x 25.8	1
10	058 12	20 A - 400 V~	8.5 x 31.5	1
10	058 13	25 A	10.3 x 31.5	1
10	058 14	32 A	10.3 x 38	1
		Single pole + neutral		
10	058 20	10 A - 230 V~	8.5 x 23	1
10	058 21	16 A	10.3 x 25.8	1
10	058 22	20 A - 400 V~	8.5 x 31.5	1
10	058 23	25 A	10.3 x 31.5	1
10	058 24	32 A	10.3 x 38	1

Pack	Cat.Nos	For miniature cylindrical cartridge fuses		
		Conform to EN 60127-6 and IEC 60127-6 To protect sensitive equipment: transformers, electronic equipment, etc.		
		Single pole		
		Cartridge dimensions (mm)	Voltage	Number of modules
5	058 00	5 x 20	250 V~	1
		Single pole + neutral		
5	058 02	5 x 20	250 V~	1


domestic cartridge fuses

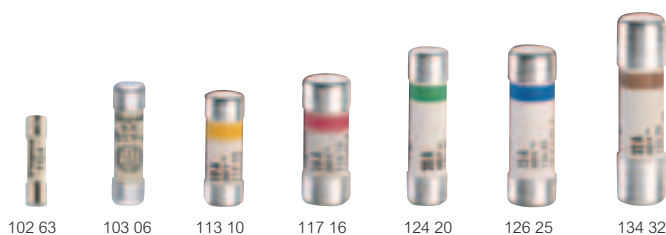

Pack	Cat.Nos	Miniature type 5 x 20		
		Instant reaction fuse - Ceramic body Conform to IEC 60127 and IEC 60127-2 - EN 60127 and EN 60127-2 - VDE 0820-1 High rupture capacity (A)		
		For use with dimmers, Viking terminal blocks and emergency lighting units, transformers		
		Rating (Amps)	Voltage ~ (Volts)	Rupture capacity (Amps)
10	102 02	0.2	250	1500
10	102 05	0.5		
10	102 06	0.63		
10	102 10	1		
10	102 20	2		
10	102 30	3.15	250	500
10	102 50	5		
10	102 63	6.3		
10	102 96	10		

		Cylindrical					
		6.3 x 23					
	Without indicator	With indicator	Rating (Amps)	Voltage ~ (Volts)	Rupture capacity (Amps) Copper	Protected section (mm ²)	Color Indication
10	103 06 ⁽¹⁾		6	230	6 000	1.5	
		8.5 x 23					
10		114 06	6	230	6 000	1.5	
10/100	113 10	114 10	10				
		10.3 x 25.8					
10	116 10 ⁽¹⁾		10	230	6 000	2.5	
10	116 16 ⁽¹⁾	117 16 ⁽¹⁾	16				
		8.5 x 31.5					
10	123 01		1	400	20 000	2.5	
10	123 02	124 02	2				
10	123 04	124 04	4				
10	123 06	124 06	6				
10/100	123 10		10				
10		124 10	10	400	20 000	4	
10/100	123 16	124 16	16				
10/100	123 20	124 20	20				
		10.3 x 31.5					
10	126 16		16	400	20 000	4	
10	126 20		20				
10	126 25	127 25	25				
		10.3 x 38					
10/100	133 32		32	400	20 000	6	
10		134 32	32				
		Neutral links					
10	123 00		8.5 x 31.5				
10	133 00		10 x 38				

Other cartridge fuses (p. 110)

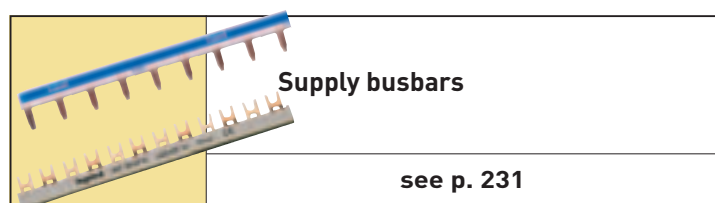

(1) Conform to BS 1361 (1971)

Bold pack quantities: Minimum quantities to be ordered