



**WT120C G3 27S/840 PSU
L1200**

911401835588



CoreLine waterproof gen3, 17 W, L1200 mm, 2700 lm, 4000 K, Symmetrical, Clear, IP66, IK08, EL-ready

L1200 mm, Polycarbonate, Grey, Power supply unit (On/Off), 2700 lm, 17 W, 159 lm/W, 4000 K, (0.38, 0.37) SDCM<3, Symmetrical, Clear, Polycarbonate, IP66 | Dust penetration-protected, jet-proof, IK08 | 6 J, Safety class I, Push-in connector 5-pole, Self-contained emergency lighting is possible when used with a compatible battery kit accessory

Warnings and Safety

- UV radiation will damage the material over time resulting in loss of waterproof sealing and IP66 rating.
- Do not install the luminaire in locations where it will be exposed to direct sunlight.

General Information

Number of gear units	1 unit
Driver included	Yes
Service tag	Yes
Value ladder	Performance
Warranty period	5 years

Light Technical

Luminous Flux	2,700 lm
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	159 lm/W
Color rendering index (CRI)	>80
Light source color	840 neutral white
Optic type	Symmetrical
Luminaire light beam spread	110°
Unified glare rating CEN	25

Operating and Electrical

Input Voltage	220-240 V
Line Frequency	0/50/60 Hz
Inrush current	14.6 A
Inrush time	0.228 ms
Power Consumption	17 W
Power Factor (Fraction)	0.90
Connection	Push-in connector 5-pole
Cable	-
Number of products on MCB of 16 A type B	34
Suitable for random switching	Yes
Protection class IEC	Safety class I
Feed-through wiring	-

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No

Mechanical and Housing

Housing Material	Polycarbonate
Reflector material	Steel
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	Stainless steel
Housing Color	Grey
Optical cover finish	Clear
Overall length	1,215 mm
Overall width	80 mm
Overall height	76 mm
Dimensions (Height x Width x Depth)	76 x 80 x 1215 mm
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [6 J]
Net Weight (Piece)	1.280 kg

Emergency Operation

Central Emergency	No
Emergency lighting	Self-contained emergency lighting is possible when used with a compatible battery kit accessory

Approval and Application

Glow-wire test	Temperature 850 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 °C to 40 °C

Initial Performance (IEC Compliant)

Luminous flux tolerance	+15%/-5%
Initial chromaticity	(0.38, 0.37) SDCM<3
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Control gear failure rate at median useful life 100000 h	10 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L90
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	L80

Sustainability Data

Sustainability rating	Unclassified
Repair class	Repair Class B, the driver and light source of this luminaire can be replaced by a service technician. Parts and documentation are available for an extended period of time.
Non-virgin material ratio of the packaging	Cardboard > 80% recycled
Packaging Recyclable content ratio	Cardboard recycling rate > 80%
Packaging Material	Cardboard

Product Data


Order product name	WT120C G3 27S/840 PSU L1200
Full product name	WT120C G3 27S/840 PSU L1200
Full product code	872110333306399
Order code	911401835588

Material Nr. (12NC)	911401835588
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8721103333063
Numerator - Packs per outer box	9
EAN/UPC - Case	8721103333995

Dimensional drawing



Polar normal diagrams

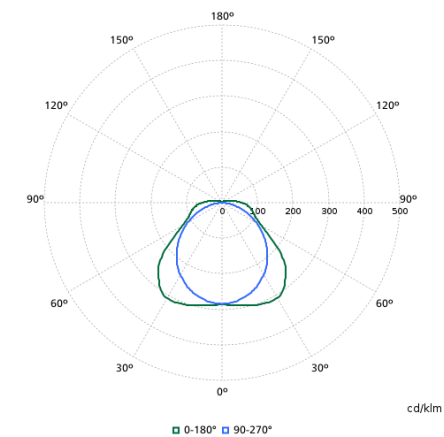

Compatible Accesories

Accessory Image	Accessory Code	Accessory Name	Website
	911401816787	WT120Z TW-3x2.5-L1200 10pcs	Product Website ↗
	911401816887	WT120Z TW-5x2.5-L1200 10pcs	Product Website ↗
	912401483668	EM300V ELB_P3 kit HV 6.4V 2000mAh LFP v2	Product Website ↗

Related Documents

Documents and certificates	Document Name	Download
Installation Instructions	CoreLine-waterproof-G3-Installation-Instruction-v202512.pdf	Download 📄
Environmental Product Declaration	EPD-HUB-EPD-PHILIPS-WT120C-G3-L1200-Ref-911401835788.pdf	Download 📄

Photometry and lighting design	Document Name	Download
IES File	IES File - 911401835588.ies	Download 📄
LDT File	LDT File - 911401835588.ldt	Download 📄
ROLF File	ROLF File - 911401835588.rolfz	Download 📄
ULD File	ULD File - 911401835588.uld	Download 📄
Revit file	Revit file - 911401835588.zip	Download 📄

