
**Aura Lunaria RE 295x295 1700
On/Off 840 CWP-2,5m**

Article number 37818401700-1



Product feature

Driver type	On/off
Material of housing	Aluminium
Material of diffuser/optics	Polycarbonate (PC)
Diffuser/optics	Microprismatic
Light source	Integrated LED
Color of housing	White
RAL	9010
Gtin	7333160033308

Installation data

Mounting	Recessed
Cable entries	2
Connection	Cable
Looping	Yes

Lifetime

Calculated LED lifetime, L70 (h)	> 100 000
Calculated LED lifetime, L80 (h)	> 100 000
Driver lifetime (h)	100 000

Measurements

Length (mm)	295
Height/depth (mm)	10
Width (mm)	295
Net weight (kg)	1.05

Photometric data




Color T (K)	4000
Color Rendering Index (CRI)	≥80
Light distribution	Direct
Beam description	Medium wide
Unified Glare Rating (UGR)	≤22
Efficacy (lm/W)	124
Flux (lm)	1740
SDCM	≤3

Technical data

IP class	IP44
IK class	IK07
Ambient temp, min (°C)	+10
Ambient temp, max (°C)	+30
Compliance	CE; REACH

Electrical data

Frequency (Hz)	0/50-60
Voltage (V)	220-240
Isolation	Class 2
Power (W)	14
Qty per B16 MCB	36
Qty per C10 MCB	37
Qty per C16 MCB	61
Power factor	≥0.90

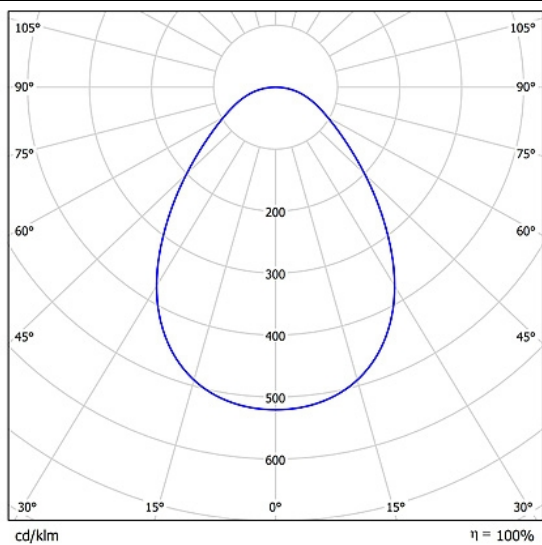



**Aura Lunaria RE 595x595 3200
On/Off 940 CWP-2,5m**

Article number 37829403200-1

Product feature

Driver type	On/off
Material of housing	Aluminium
Material of diffuser/optics	Polycarbonate (PC)
Diffuser/optics	Microprismatic
Light source	Integrated LED
Color of housing	White
RAL	9010
Gtin	7333160033704

Installation data

Mounting	Recessed
Cable entries	2
Connection	Cable
Looping	Yes

Lifetime

Calculated LED lifetime, L70 (h)	> 100 000
Calculated LED lifetime, L80 (h)	> 100 000
Driver lifetime (h)	100 000

Measurements

Length (mm)	595
Height/depth (mm)	10
Width (mm)	595
Net weight (kg)	3.8

Photometric data

Color T (K)	4000
Color Rendering Index (CRI)	≥90
Light distribution	Direct
Beam description	Medium wide
Unified Glare Rating (UGR)	≤19
Efficacy (lm/W)	108
Flux (lm)	3360
SDCM	≤3

Technical data

IP class	IP44
IK class	IK07
Ambient temp, min (°C)	+10
Ambient temp, max (°C)	+30
Compliance	CE; REACH

Electrical data

Frequency (Hz)	0/50-60
Voltage (V)	220-240
Isolation	Class 2
Power (W)	31
Qty per B16 MCB	33
Qty per C10 MCB	34
Qty per C16 MCB	56
Power factor	≥0.90

